




RivetKing® SBS-CE Series • All Steel • Closed End

ALL STEEL • DOME HEAD • CLOSED END BLIND RIVETS

STANDARD BLIND RIVETS

RIVET: DOME HEAD, ZINC PLATED, C-1002 STEEL | MANDREL: ZINC PLATED, STEEL | PER IFI-126 GRADE 30

Closed End Rivets are used when a weather proof / leak proof seal is needed. Its completely closed end design prevents liquids, moisture, air and other contaminants from entering the riveted hole and/or the rivet itself. The RivetKing® Closed End Rivet design guarantees the mandrel head is fully retained within the rivet. Steel/Steel Closed End rivets are trivalent zinc plated.

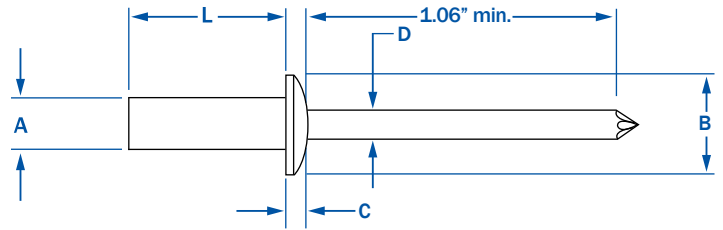

FOR SUPERIOR CORROSION PROTECTION USE ABA-CE OR FBF-CE.



PART NUMBER	RIVET SIZE	A		L	B	C	D	HOLE SIZE	SHEAR	TENSILE
		GRIP RANGE		LENGTH	HEAD DIA	HEAD HEIGHT	MANDREL DIA			
		MIN - MAX	MAX	NOM.	NOM.	NOM.	MIN - MAX			
SBS - 42 - CE	1/8"	.063 - .125	.360	.250	.040	.076	129 - .133 (#30)	240	270	
SBS - 43 - CE		.126 - .187	.422							
SBS - 44 - CE		.188 - .250	.485							
SBS - 45 - CE		.251 - .312	.547							
SBS - 46 - CE		.313 - .375	.610							
SBS - 48 - CE		.376 - .500	.735							
SBS - 52 - CE	5/32"	.020 - .125	.375	.312	.050	.095	.160 - .164 (#20)	390	420	
SBS - 53 - CE		.126 - .187	.437							
SBS - 54 - CE		.188 - .250	.500							
SBS - 56 - CE		.251 - .375	.625							
SBS - 58 - CE		.376 - .500	.750							
SBS - 510 - CE		.501 - .625	.875							
SBS - 62 - CE	3/16"	.020 - .125	.406	.375	.060	.114	.192 - .196 (#11)	550	640	
SBS - 63 - CE		.126 - .187	.468							
SBS - 64 - CE		.188 - .250	.531							
SBS - 66 - CE		.251 - .375	.656							
SBS - 68 - CE		.376 - .500	.781							
SBS - 610 - CE		.501 - .625	.906							
SBS - 612 - CE		.626 - .750	1.026							

3/32" and 1/4" Diameter Rivets can be quoted on request.

