





# RivetKing® ABS-RT™ Series · "Ring Style" · MultiGrip-RT™

ALUMINUM/STEEL MULTIGRIP™ "RING STYLE"

RIVET: ALUMINUM | MANDREL: STEEL, TRIVALENT ZINC CLEAR PLATED

The benefit of a MultiGrip™ is that they offer a wider grip range than traditional blind rivets assisting the users in inventory reduction and part consolidation efforts. The RT™ series has aesthetic appeal to the backside of the assembly. TS-16949 produced and when applicable on steel, trivalent zinc plated for ROHS and GMW3044 compliance.

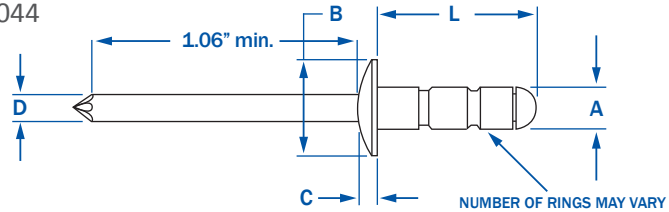

HEAD STYLE	PART NUMBER	A RIVET SIZE	L		B	C	D	HOLE SIZE MIN. - MAX.	SHEAR LBS.F	TENSILE LBS.F
			GRIP RANGE MIN. - MAX.	LENGTH MAX.	HEAD DIA NOM.	HEAD HEIGHT NOM.	MANDREL DIA NOM.			
DOME HEAD	ABS - 41 - 42MGRT	1/8"	.020 - .125	.313	.250	.043	.075	.129 - .133 (#30)	122	176
	ABS - 41 - 43MGRT		.039 - .187	.389						
	ABS - 43 - 44MGRT		.156 - .250	.500						
	ABS - 43 - 45MGRT		.196 - .330	.586						
	ABS - 45 - 47MGRT	.236 - .445	.704	5/32"	.312	.051	.088	.160 - .164 (#20)	198	354
	ABS - 51 - 53MGRT	.032 - .157	.393							
	ABS - 52 - 54MGRT	.047 - .276	.512							
	ABS - 53 - 55MGRT	.156 - .354	.590							
	ABS - 54 - 58MGRT	.276 - .472	.708	3/16"	.375	.062	.114	.192 - .196 (#11)	331	486
	ABS - 62 - 64MGRT	.062 - .250	.519							
	ABS - 63 - 67MGRT	.187 - .456	.716							
	ABS - 66 - 69MGRT	.275 - .598	.875							
	ABS - 66 - 610MGRT	.393 - .670	.952	1/4"	.511	.070	.141	.257 - .261 (F)	630	900
	ABS - 610 - 612MGRT	.500 - .787	1.070							
	ABS - 82 - 84MG	.062 - .250	.472							
	ABS - 84 - 86MG	.156 - .375	.590							
ABS - 86 - 88MG	.250 - .750	.708	LARGE FLANGE	1/8"	.375	.043	.075	.129 - .133 (#30)	122	176
ABS - 41 - 43LFMGRT	.020 - .125	.313								
ABS - 43 - 44LFMGRT	.156 - .250	.500		5/32"	.500	.051	.088	.160 - .164	198	354
ABS - 52 - 54LFMGRT	.047 - .276	.512								
ABS - 62 - 64LFMGRT	.062 - .250	.519		3/16"	.612	.062	.114	.192 - .196 (#11)	331	486
ABS - 63 - 67LFMGRT	.187 - .456	.716								
ABS - 66 - 69LFMGRT	.275 - .598	.875	C'SUNK	1/8"	.209	.029	.057	.129 - .138	165	230
ACS - 43 - 44MGRT	.093 - .250	.383								
ACS - 53 - 55MGRT	110 - .312	.470		5/32"	.252	.049	.086	.161 - .169	255	375
ACS - 62 - 65MGRT	.062 - .312	.500								
ACS - 66 - 68MGRT	.250 - .500	.690	3/16"	.345	.051	.108	.192 - .200	350	530	

\*1/4" Diameter rivets have a 1.250 mandrel length minimum.




# RivetKing® ABA-RT™ Series · "Ring Style" · MultiGrip-RT™

ALUMINUM/ALUMINUM MULTIGRIP™ "RING STYLE"

RIVET: ALUMINUM | MANDREL: ALUMINUM ALLOY

The benefit of a MultiGrip™ is that they offer a wider grip range than traditional blind rivets assisting the users in inventory reduction and part consolidation efforts. The RT series has aesthetic appeal to the backside of the assembly. TS-16949 produced and when applicable on steel, trivalent zinc plated for ROHS and GMW3044 compliance.

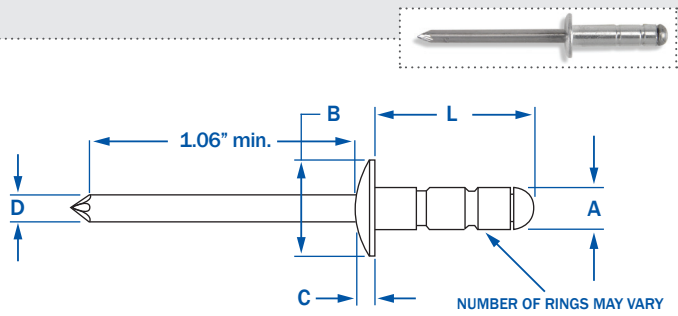

HEAD STYLE	PART NUMBER	RIVET SIZE	GRIP RANGE		LENGTH NOM.	HEAD DIA MAX.	HEAD HEIGHT MAX.	MANDREL DIA NOM.	HOLE SIZE MIN - MAX	SHEAR LBS.F	TENSILE LBS.F
			MIN	MAX							
DOME HEAD	ABA41 - 43MGRT	1/8"	.039	.187	.313	.262	.040	.076	.129 - .142 (#30)	65	85
	ABA43 - 45MGRT		.157	.312	.573						
	ABA45 - 47MGRT		.251	.437	.594						
	ABA62 - 64MGRT	3/16"	.063	.250	.425	.390	.055	.114	.192 - .205 (#11)	145	205
	ABA63 - 66MGRT		.188	.375	.605						
	ABA66 - 68MGRT		.251	.500	.716						
	ABA68 - 612MGRT		.438	.750	1.050						
LARGE FLANGE	ABA41 - 43LFMGRT	1/8"	.039	.187	.313	.390	.052	.076	.129 - .142	65	85
	ABA62 - 64LFMGRT	3/16"	.063	.250	.425	.650	.083	.114	.192 - .205 (#11)	145	205
	ABA63 - 66LFMGRT		.188	.375	.605						
	ABA68 - 612LFMGRT		.438	.750	1.050						



## RivetKing® Manual Riveters

FIND THIS!  
PLUS MORE ON  
PAGE 8

### RIVETKING® 2 IN 1- BLIND RIVET & RIVET NUT TOOL

#### WHY BUY TWO TOOLS WHEN YOU ONLY NEED ONE?

This unique tool has the ability to set both blind rivets and rivetnuts. It even has the ability to set 1/4" structural blind rivets and rivetnuts up to 3/8". The changeover from blind rivets to rivet nuts is simple and takes less than 1 minute. It's patented fold away design makes it easy to carry and store. It contains a nose piece for blind rivets and mandrels for rivetnuts in every size and is conveniently stored in the blow molded carry case. Forged Steel arms insure durability while comfort soft touch rubberized grips guarantee comfort.

RK-21 BLIND RIVETS = 1/4" & STRUCTURAL RIVET  
NUTS = 3/8" OR 10MM

